AC1200 Long Range Wi-Fi Dual-Band PCI-E Adapter
EW-7822PIC

Guía de instalación rápida

01-2015 / v1.0

Edimax Technology Co., Ltd.
No.3, Wu-Chuan 3rd Road, Wu-Gu, New Taipei City 24891, Taiwan
Email: support@edimax.com.tw

Edimax Technology Europe B.V.
Fijenhof 2, 5652 AE Eindhoven, The Netherlands
Email: support@edimax.nl

Edimax Computer Company
3350 Scott Blvd., Bldg.15 Santa Clara, CA 95054, USA
Live Tech Support: 1(800) 652-6776
Email: support@edimax.com

Contenidos

I. Información acerca del producto 1

I-1. Volumen de suministro 1
I-2. Estado del LED 1
I-3. Requisitos del sistema 1

II. Instalación del dispositivo 2

III. Asistente de configuración 4

III-1. Instalación del controlador 4
III-2. Desinstalación del controlador 8
III-2-1. Windows XP/Vista/7 8
III-2-2. Windows 8/8.1 8

IV. Uso del adaptador 9

V. Resolución de problemas 10

Multi-Language Quick Installation Guide (QIG) on the CD

Čeština: Českého průvodce rychlou instalací naleznete na přiloženém CD s ovladači.

Deutsch: Finden Sie bitte das deutsche S.A.L. beiliegend in der Treiber CD.

Español: Incluido en el CD el G.R.I. en Español.

Français: Veuillez trouver l'français G.I.R ci-joint dans le CD.

Italiano: Incluso nel CD il Q.I.G. in Italiano.

Magyar: A magyar telepítési útmutató megtalálható a mellékelt CD-n.

Nederlands: De nederlandse Q.I.G. treft u aan op de bijgesloten CD.

Polski: Skrócona instrukcja instalacji w języku polskim znajduje się na załączonej płycie CD.

Português: Incluído no CD o G.I.R. em Portugues.

Русский: Найдите Q.I.G. на русском языке на приложеном CD.

Türkçe: Ürün ile beraber gelen CD içinde Türkçe Hızlı Kurulum Kılavuzu'nu bulabilirsiniz.

Українська: Для швидкого налаштування Вашого пристрою, будь ласка, ознайомтесь з інструкцією на CD.

Română: Ghid de instalare Rapidă în limba Română în interiorul CD-ului.

I. Información acerca del producto

El EW-7822PIC es un adaptador PCIe Wi-Fi para ordenadores de sobremesa de doble banda 11ac de 2.4 GHz y 5 GHz.

I-1. Volumen de suministro



EW-7822PIC



Base antena



2 antenas

CD-ROM

Guí



Soporte de perfil bajo

I-2. Estado del LED

Estado	Descripción
Pestañeando	Actividad Wi-Fi: transmitiendo o recibiendo datos.

I-3. Requisitos del sistema

- Windows XP/Vista/7/8/8.1
- Disco duro: 100 MB
- Unidad CD-ROM
- Ranura PCIe vacía

II. Instalación del dispositivo

1. Apague y desenchufe el ordenador y extraiga la tapa.

Consulte el manual de usuario de su ordenador si no está seguro de cómo quitar la tapa y colocar la ranura PCIe.

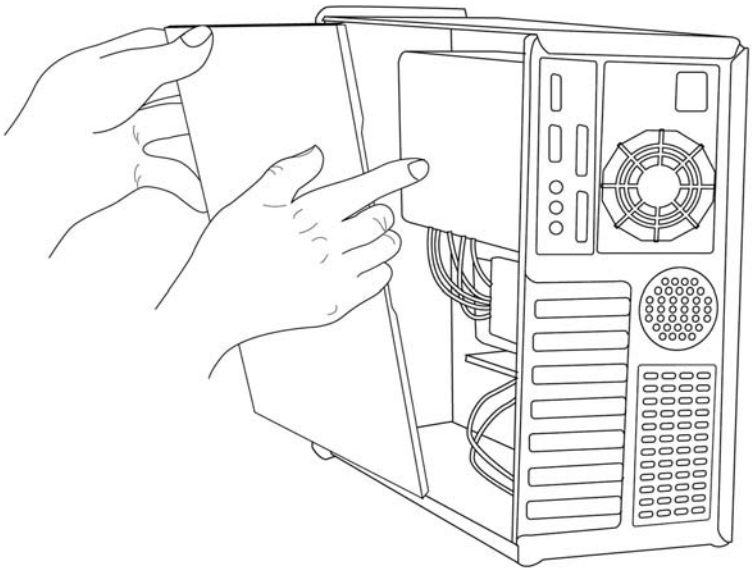

2. Inserte la tarjeta de red inalámbrica en una ranura PCIe vacía.

El embalaje incluye un soporte de perfil bajo PCIe.

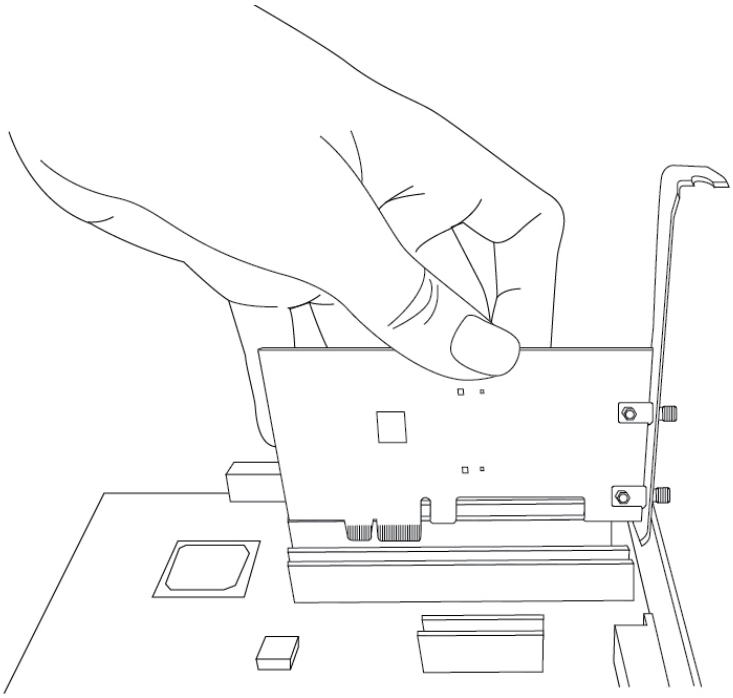

3. Vuelva a colocar la tapa del ordenador y atornille las antenas suministradas directamente en la tarjeta de red inalámbrica o utilice la base para antena suministrada.

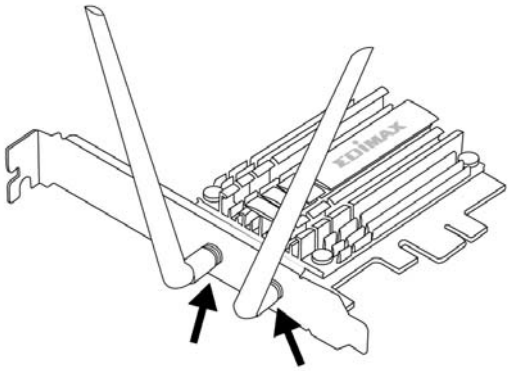

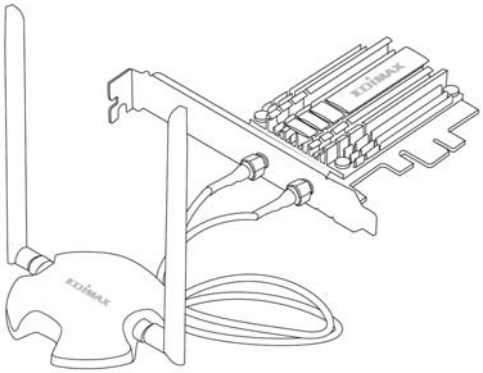

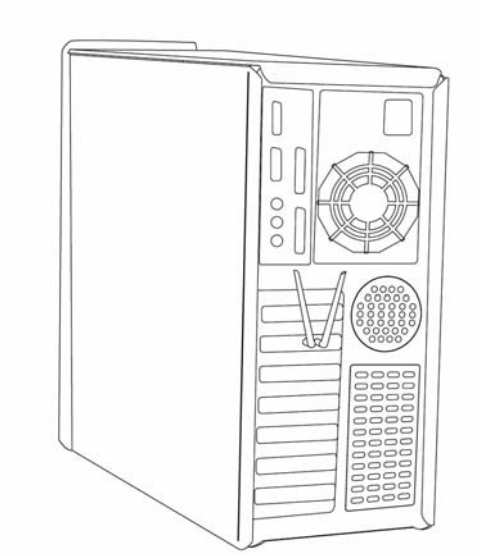

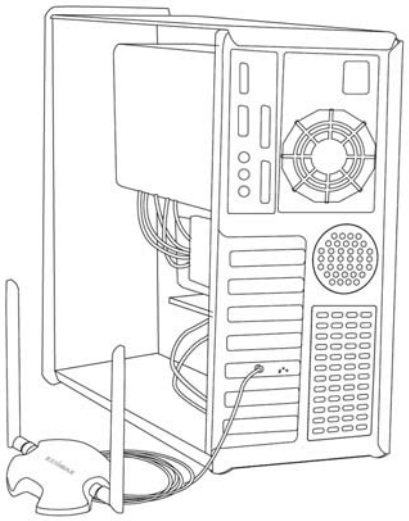

4. Si es necesario, puede ajustar la posición de la o las antenas para mejorar la recepción inalámbrica.

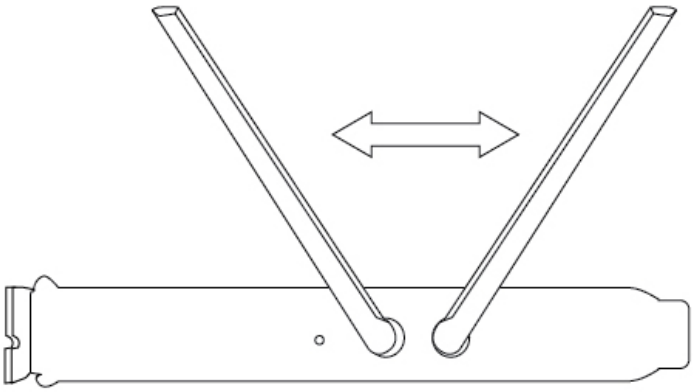

III. Asistente de configuración

III-1. Instalación del controlador

1. Encienda el ordenador y si se abre el asistente de Windows “Nuevo hardware encontrado”, ciérrelo.

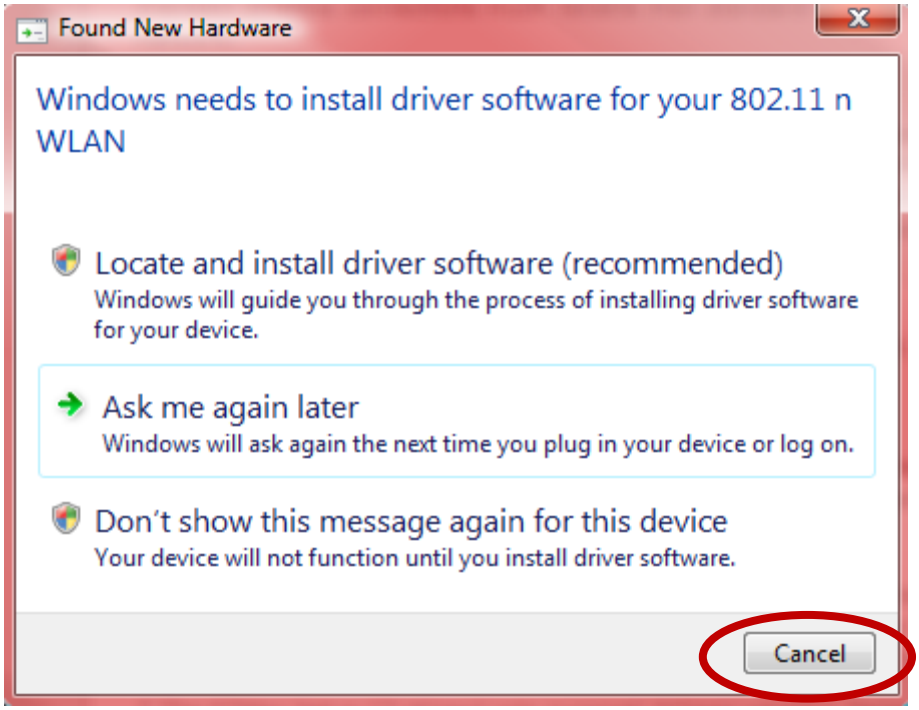
Found New Hardware
Windows needs to install driver software for your 802.11 n WLAN
Locate and install driver software (recommended)
Windows will guide you through the process of installing driver software for your device.
Ask me again later
Windows will ask again the next time you plug in your device or log on.
Don't show this message again for this device
Your device will not function until you install driver software.
Cancel

2. Introduzca el CD-ROM suministrado en la unidad de CD de su ordenador.

El asistente de configuración también se puede descargar del sitio web de Edimax.

3. El asistente de instalación se abrirá como se muestra abajo. Haga clic en adaptador inalámbrico PCIe para continuar.

Si el CD no se ejecuta automáticamente o si usted descargó el asistente de instalación, busque la carpeta “Autorun” en el CD.

4. Haga clic en "Instalar controlador" para instalar los controladores del EW-7822PIC.

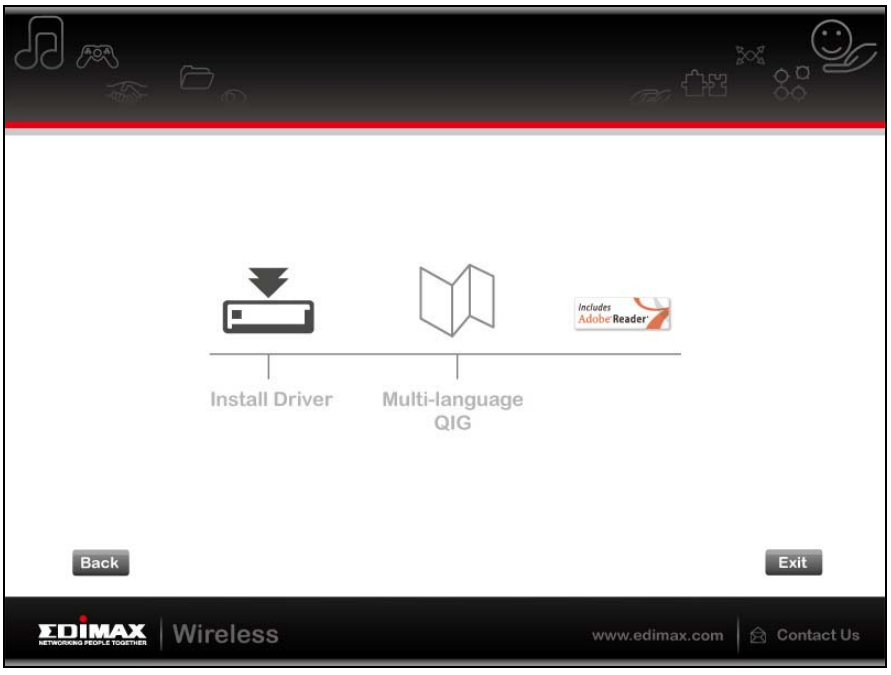

5. Espere mientras el asistente de instalación se prepara para instalar los controladores.

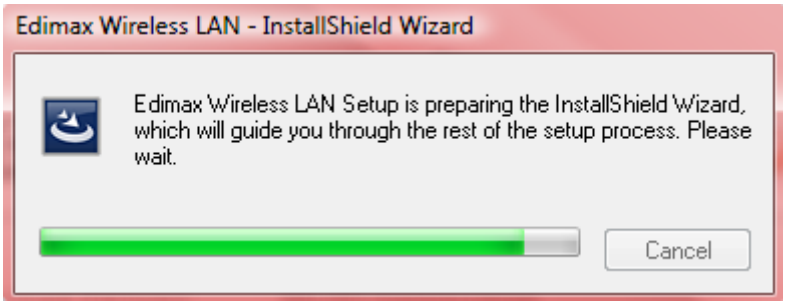
Edimax Wireless LAN - InstallShield Wizard
Edimax Wireless LAN Setup is preparing the InstallShield Wizard, which will guide you through the rest of the setup process. Please wait.
Cancel

6. Haga clic en “Siguiente” para instalar el controlador.

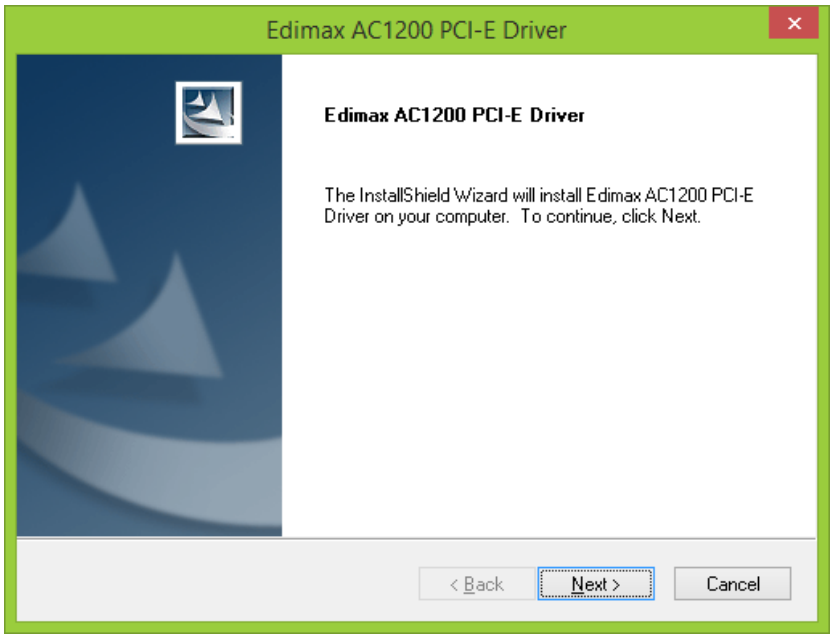
Edimax AC1200 PCI-E Driver
Edimax AC1200 PCI-E Driver
The InstallShield Wizard will install Edimax AC1200 PCI-E Driver on your computer. To continue, click Next.
< Back
Next >
Cancel

7. Espere a que se instale el controlador.

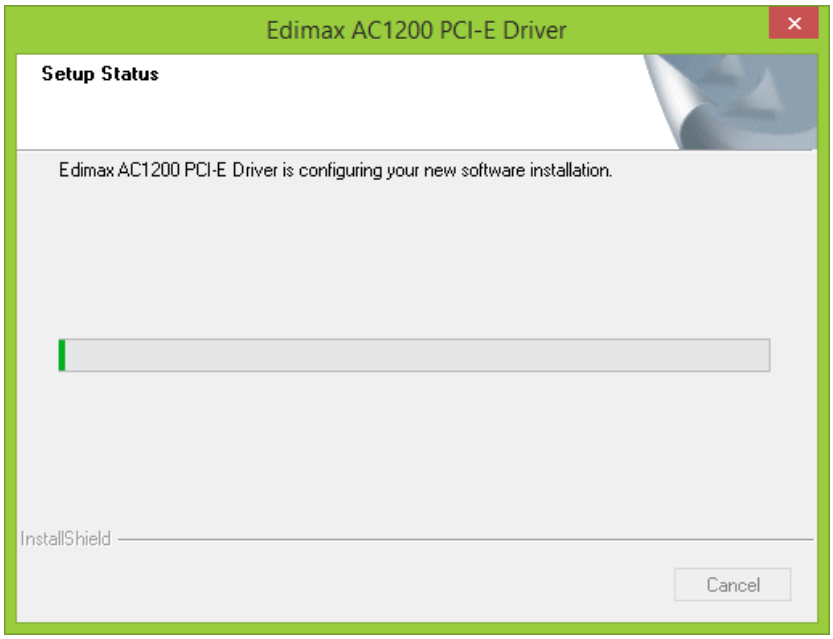

8. Cuando se haya completado la instalación, seleccione si reiniciar el ordenador ahora o más tarde y haga clic en “Finalizar”.

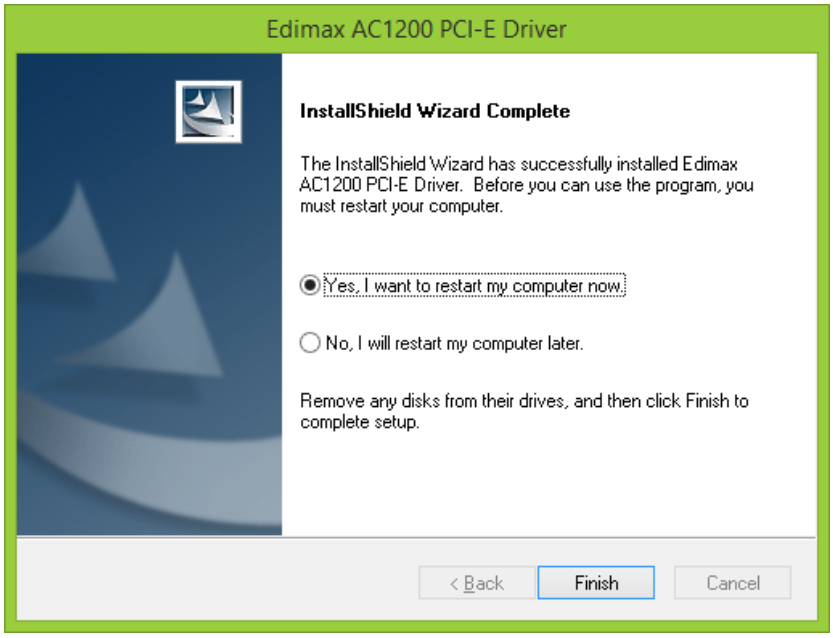
Edimax AC1200 PCI-E Driver
InstallShield Wizard Complete
The InstallShield Wizard has successfully installed Edimax AC1200 PCI-E Driver. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
Remove any disks from their drives, and then click Finish to complete setup.
< Back
Finish
Cancel

9. Después de reiniciar, podrá conectarse a una red Wi-Fi disponible, como de costumbre. Para consultar las instrucciones, véase **IV. Uso del adaptador.**

III-2. Desinstalación del controlador

III-2-1. Windows XP/Vista/7

1. Vaya a **Inicio > Programas > Edimax Wireless LAN > Desinstalar**.

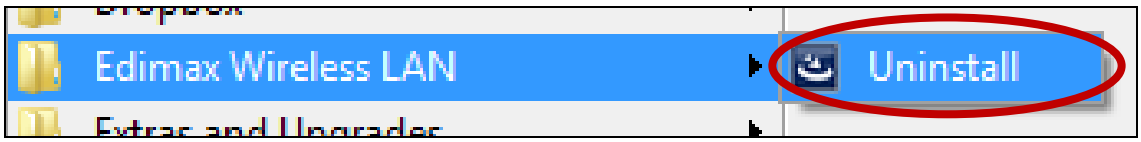

2. Siga las instrucciones que aparecen en la pantalla. El asistente de desinstalación le guiará a lo largo del proceso.

III-2-2. Windows 8/8.1

1. Haga clic con el botón secundario en la pantalla de **Inicio** y pulse el icono "Todas las aplicaciones" en la esquina inferior derecha.



2. Busque la categoría Edimax Wireless LAN, seleccione "Desinstalar" y siga las instrucciones que aparecen en la pantalla.

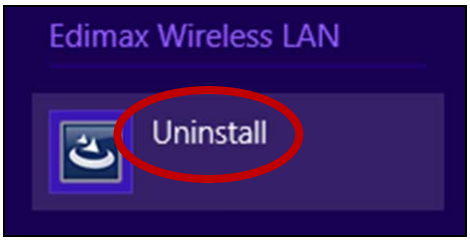

IV. Uso del adaptador

Una vez que haya instalado el controlador, podrá conectarse a la red Wi-Fi como de costumbre.

A continuación se muestra un ejemplo de cómo conectarse usando Windows Vista. El proceso puede variar ligeramente para otras versiones de Windows.

1. Haga clic en el icono de red (como en el ejemplo de abajo) de la bandeja del sistema y seleccione “Conectarse a una red”.

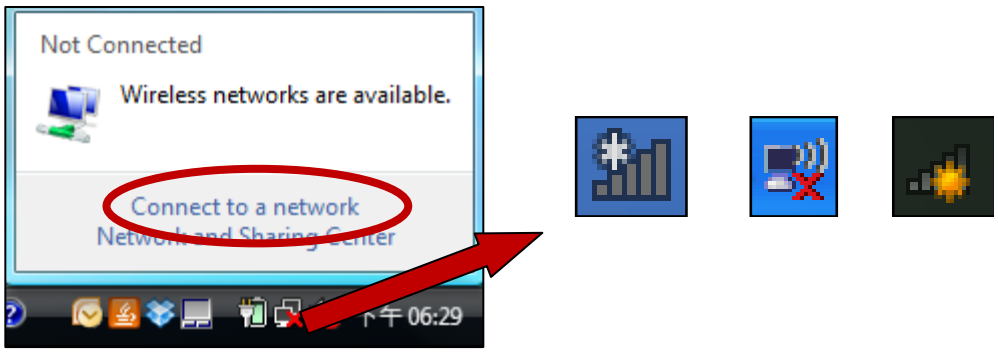

2. Busque el SSID de su red Wi-Fi y seleccione “Conectar". Si ha configurado su red con contraseña, se le solicitará que la introduzca.

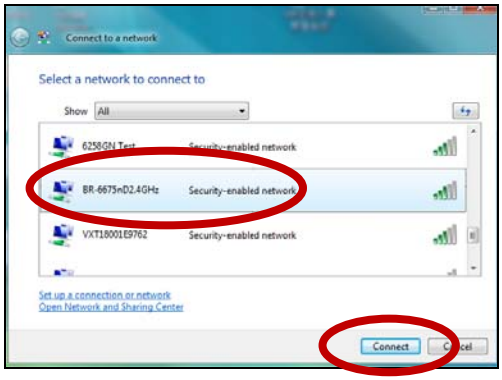

3. Una vez introducida correctamente su contraseña, se conectará con éxito a su red Wi-Fi.

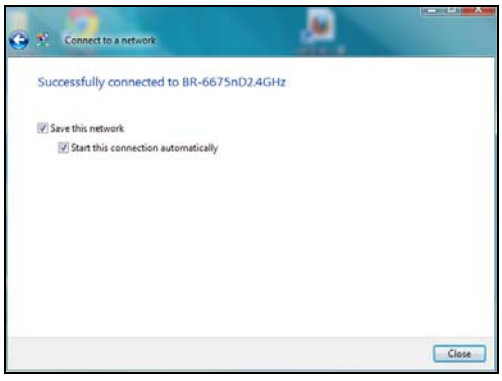

V. Resolución de problemas

1. El Wi-Fi parece lento o no tiene velocidad 802.11ac.

a. Para alcanzar la velocidad 802.11ac Wi-Fi, es necesario conectarse con un enrutador Wi-Fi 802.11ac.
b. Puede tener su velocidad Internet y no la velocidad de su red local. La velocidad de Internet está limitada por el ancho de banda que proporciona su proveedor de servicios Internet. Algunos sitios web tales como www.speed test.net comprueban la velocidad de Internet y no la velocidad interna de su red. Al transferir archivos entre dos ordenadores locales, obtendrá su velocidad de red real.
c. Compruebe que las antenas estén bien apretadas a los puertos de la antena o la base de la antena. Coloque la base de la antena en un lugar donde no haya obstrucciones ni en rincones para una mejor prestación.

2. Coloqué el adaptador PCIe e instalé los controladores, pero no puede conectarme a ninguna de las redes Wi-Fi.

a. Vaya al panel de control y desinstale el controlador del EW-7822PIC. Compruebe que todos los programas antivirus estén desactivados. Vuelva a instalar el controlador EW7822PIC.

COPYRIGHT

Copyright © Edimax Technology Co., Ltd. all rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission from Edimax Technology Co., Ltd.

Edimax Technology Co., Ltd. makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties, merchantability, or fitness for any particular purpose. Any software described in this manual is sold or licensed as is. Should the programs prove defective following their purchase, the buyer (and not this company, its distributor, or its dealer) assumes the entire cost of all necessary servicing, repair, and any incidental or consequential damages resulting from any defect in the software. Edimax Technology Co., Ltd. reserves the right to revise this publication and to make changes from time to time in the contents hereof without the obligation to notify any person of such revision or changes.

The product you have purchased and the setup screen may appear slightly different from those shown in this QIG. The software and specifications are subject to change without notice. Please visit our website www.edimax.com for updates. All brand and product names mentioned in this manual are trademarks and/or registered trademarks of their respective holders.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio technician for help.

FCC Caution

This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

Federal Communications Commission (FCC) Radiation Exposure Statement

This equipment complies with FCC radiation exposure set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 2.5cm (1 inch) during normal operation.

Federal Communications Commission (FCC) RF Exposure Requirements

This EUT is compliance with SAR for general population/uncontrolled exposure limits in ANSI/IEEE C95.1-1999 and had been tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C. The equipment version marketed in US is restricted to usage of the channels 1-11 only. This equipment is restricted to ***indoor*** use when operated in the 5.15 to 5.25 GHz frequency range.

R&TTE Compliance Statement

This equipment complies with all the requirements of DIRECTIVE 1999/5/EC OF THE EUROPEAN PARLIAMENT AND THE COUNCIL of March 9, 1999 on radio equipment and telecommunication terminal equipment and the mutual recognition of their conformity (R&TTE). The R&TTE Directive repeals and replaces in the directive 98/13/EEC (Telecommunications Terminal Equipment and Satellite Earth Station Equipment) As of April 8, 2000.

Safety

This equipment is designed with the utmost care for the safety of those who install and use it. However, special attention must be paid to the dangers of electric shock and static electricity when working with electrical equipment. All guidelines of this and of the computer manufacture must therefore be allowed at all times to ensure the safe use of the equipment.

EU Countries Intended for Use

The ETSI version of this device is intended for home and office use in Austria, Belgium, Bulgaria, Cyprus, Czech, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Turkey, and United Kingdom. The ETSI version of this device is also authorized for use in EFTA member states: Iceland, Liechtenstein, Norway, and Switzerland.

EU Countries Not Intended for Use

None.

EU Declaration of Conformity

English: This equipment is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC, 2009/125/EC.

Français: Cet équipement est conforme aux exigences essentielles et autres dispositions de la directive 1999/5/CE, 2009/125/CE.

Čeština: Toto zařízení je v souladu se základními požadavky a ostatními příslušnými ustanoveními směrnic 1999/5/ES, 2009/125/ES.

Polski: Urządzenie jest zgodne z ogólnymi wymaganiami oraz szczególnymi warunkami określonymi Dyrektywą UE 1999/5/EC, 2009/125/EC.

Română: Acest echipament este în conformitate cu cerinţele esenţiale şi alte prevederi relevante ale Directivei 1999/5/CE, 2009/125/CE.

Русский: Это оборудование соответствует основным требованиям и положениям Директивы 1999/5/EC, 2009/125/EC.

Magyar: Ez a berendezés megfelel az alapvető követelményeknek és más vonatkozó irányelveknek (1999/5/EK, 2009/125/EC).

Türkçe: Bu cihaz 1999/5/EC, 2009/125/EC direktifleri zorunlu istekler ve diğer hükümlerle ile uyumludur.

Українська: Обладнання відповідає вимогам і умовам директиви 1999/5/EC, 2009/125/EC.

Slovenčina: Toto zariadenie spĺňa základné požiadavky a ďalšie príslušné ustanovenia smerníc 1999/5/ES, 2009/125/ES.

Deutsch: Dieses Gerät erfüllt die Voraussetzungen gemäß den Richtlinien 1999/5/EC, 2009/125/EC.

Español: El presente equipo cumple los requisitos esenciales de la Directiva 1999/5/EC, 2009/125/EC.

Italiano: Questo apparecchio è conforme ai requisiti essenziali e alle altre disposizioni applicabili della Direttiva 1999/5/CE, 2009/125/CE.

Nederlands: Dit apparaat voldoet aan de essentiële eisen en andere van toepassing zijnde bepalingen van richtlijn 1999/5/EC, 2009/125/EC.

Português: Este equipamento cumpre os requesitos essênciais da Directiva 1999/5/EC, 2009/125/EC.

Norsk: Dette utstyret er i samsvar med de viktigste kravene og andre relevante regler i Direktiv 1999/5/EC, 2009/125/EC.

Svenska: Denna utrustning är i överensstämmelse med de väsentliga kraven och övriga relevanta bestämmelser i direktiv 1999/5/EG, 2009/125/EG.

Dansk: Dette udstyr er i overensstemmelse med de væsentligste krav og andre relevante forordninger i direktiv 1999/5/EC, 2009/125/EC.

Suomi: Tämä laite täyttää direktiivien 1999/5/EY, 2009/125/EY oleelliset vaatimukset ja muut asiaankuuluvat määräykset.

FOR USE IN AT BE CY CZ DK EE FI FR RU DE GR HU IE IT LV LT LU MT NL PL PT UA SK SI ES SE GB IS LI NO CH BG RO TR

WEEE Directive & Product Disposal

At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Declaration of Conformity

We, Edimax Technology Co., Ltd., declare under our sole responsibility, that the equipment described below complies with the requirements of the European R&TTE directives.

Equipment: AC1200 Long Range Wi-Fi Dual-Band PCI Express Adapter

Model No.: EW-7822PIC

The following European standards for essential requirements have been followed:

Directives 1999/5/EC

Spectrum	:	ETSI EN 300 328 V1.8.1 (2012-06); ETSI EN 301 893 V1.7.1 (2012-06)
EMC	:	EN 301 489-1 V1.9.2 (2011); EN 301 489-17 V2.2.1 (2012)
Safety (LVD)	:	EN 60950-1:2006+A11:2009+A1:2010+A12:2011

Directives 2006/95/EC

Safety (LVD)	:	EN 60950-1:2006+A11:2009+A1:2010+A12:2011

Edimax Technology Co., Ltd.
No. 3, Wu Chuan 3rd Road,
Wu-Ku Industrial Park,
New Taipei City, Taiwan

CE

Date of Signature: February, 2015

Signature: 

Printed Name: Albert Chang

Title: Director
Edimax Technology Co., Ltd.

EDIMAX
NETWORKING PEOPLE TOGETHER